
Physics 122/121

**Applications of Vectors** 


## **VECTOR REVIEW**

<u>Vector quantities</u> have both <u>magnitude</u> and <u>direction</u>. Some vector quantities are velocity, force, acceleration and momentum.

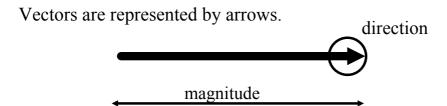

## **Graphical Methods of Adding Vectors**


1. Tip-to-tail Method

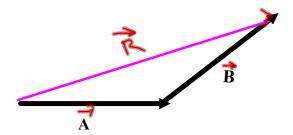


R - resultant (sum of vectors)

## Components of a Vector

A vector can be expressed as the sum of two other vectors, called the <u>components</u> of the vector. The process of finding the components of a vector is called <u>vector resolution</u>. We will always be finding the <u>perpendicular</u> components of a vector.




Use trigonometric ratios to determine the magnitudes of the components. The arrows of the components show their directions.

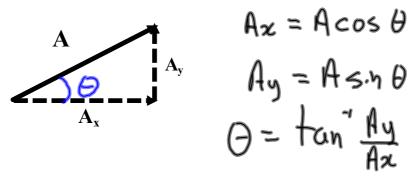

Ex: Find the components of the following:

a) 
$$95 \text{ km} [E39^{\circ}N]$$
  
 $E_{0}st = 95 \cos 39 = 74Km$   
 $N_{0}sth = 95 \sin 39 = 60 \text{ km}$ 




b) 112 m/s [E77°S]  

$$E_{ast} = 112 \cos 77 = 25 \text{ m/s}$$
  
 $N_{arth} = -112 \text{ Sm}77 = -109 \text{ m/s}$   
c) 1575 m [W22°S]  
 $E_{ast} = -1575 \cos 22 = -1460 \text{ m}$   
 $N_{arth} = -1575 \sin 22 = -596$ 


## Adding Vectors Using Perpendicular Components

- 1. Resolve each vector into its perpendicular components.
- 2. Add corresponding vector components.


$$\mathbf{R}_{\mathbf{x}} = \mathbf{A}_{\mathbf{x}} + \mathbf{B}_{\mathbf{X}}$$
$$\mathbf{R}_{\mathbf{y}} = \mathbf{A}_{\mathbf{y}} + \mathbf{B}_{\mathbf{y}}$$




- 3. Sketch  $\mathbf{R}_{x}$  and  $\mathbf{R}_{y}$  tip-to-tail.
- 4. Use the Law of Pythagoras and a trig ratio to determine the magnitude and direction of the resultant.

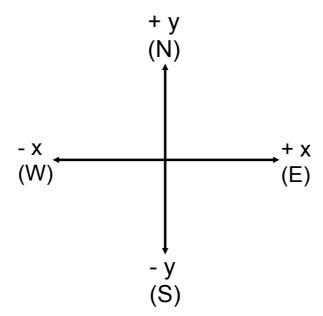


Consider the two vectors A and B.

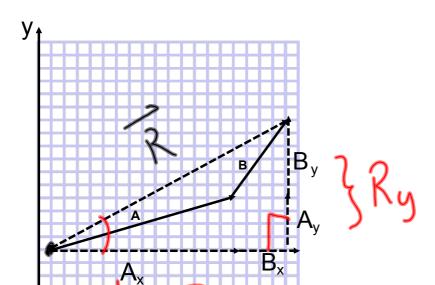



Example- Find the resultant of 1.60 km, east and 3.40 km, E35.0 N




$$\mathbf{A}_{\mathbf{x}} = + 1.60 \text{ km}$$
$$\mathbf{A}_{\mathbf{y}} = 0 \text{ km}$$

$$\mathbf{B_x} = (3.40 \text{ km})(\cos 35.0^\circ)$$
  
 $\mathbf{B_x} = +2.785 \text{ km}$ 

$$\mathbf{B_y} = (3.40 \text{ km})(\sin 35.0^\circ)$$
  
 $\mathbf{B_y} = +1.95 \text{ km}$ 

$$\mathbf{R}_{x} = 1.60 \text{ km} + 2.785 \text{ km} = 4.385 \text{ km}$$
  
 $\mathbf{R}_{y} = 0 \text{ km} + 1.950 \text{ km} = 1.950 \text{ km}$ 

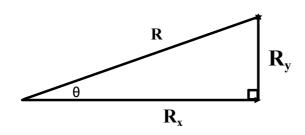

$$R = \sqrt{(4.385)^2 + (1.950)^2}$$

R = 4.80 km

$$\tan \theta = \frac{R_y}{R_x}$$

$$\theta = 24.0$$
°

R = 4.80 km, E24.0 N